



Early Journal Content on JSTOR, Free to Anyone in the World

This article is one of nearly 500,000 scholarly works digitized and made freely available to everyone in the world by JSTOR.

Known as the Early Journal Content, this set of works include research articles, news, letters, and other writings published in more than 200 of the oldest leading academic journals. The works date from the mid-seventeenth to the early twentieth centuries.

We encourage people to read and share the Early Journal Content openly and to tell others that this resource exists. People may post this content online or redistribute in any way for non-commercial purposes.

Read more about Early Journal Content at <http://about.jstor.org/participate-jstor/individuals/early-journal-content>.

JSTOR is a digital library of academic journals, books, and primary source objects. JSTOR helps people discover, use, and build upon a wide range of content through a powerful research and teaching platform, and preserves this content for future generations. JSTOR is part of ITHAKA, a not-for-profit organization that also includes Ithaka S+R and Portico. For more information about JSTOR, please contact support@jstor.org.

SCIENCE

[Entered at the Post-Office of New York, N. Y., as Second-Class Matter.]

A WEEKLY NEWSPAPER OF ALL THE ARTS AND SCIENCES.

SEVENTH YEAR.
VOL. XIII. No. 332.

NEW YORK, JUNE 14, 1889.


SINGLE COPIES, TEN CENTS.
\$3.50 PER YEAR, IN ADVANCE.

WESTINGHOUSE ALTERNATING-CURRENT DYNAMO.

THE Westinghouse dynamo for generating an alternating current is shown in the accompanying illustration. It is apparent at a glance that it is different in principle of construction from the ordinary direct-current machine. The field is composed of a series of radial pole-pieces of alternate polarity, the cores of which are cast solid with the casing or body of the machine. The field-coils

zontal plane through the shaft. The armature may be removed and replaced in similar manner.

The general design of the dynamo is symmetrical, and of a character calculated to give the greatest rigidity in its structure. Oil is fed from the cups to the bearings, and allowed to work freely into the drip-pan, and thence into the tank in the base, whence it may be drawn off at the stop-cock, strained, and returned to the oil-cups, thus permitting thorough lubrication without waste of oil.

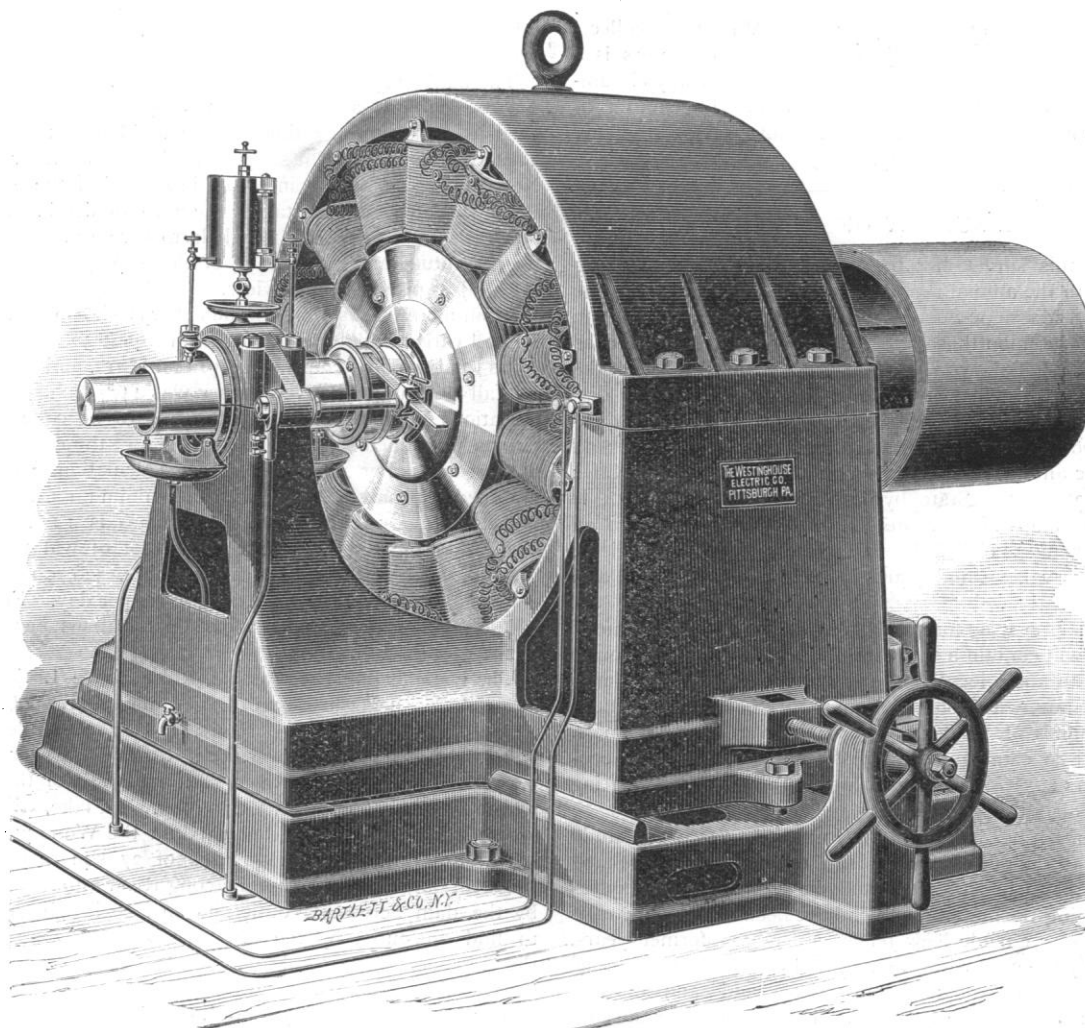

THE WESTINGHOUSE 1500-LIGHT ALTERNATING-CURRENT DYNAMO.

are a series of independent bobbins, which are first wound on shells, then slipped over the pole-pieces, and held in place by bolts. These bobbins, being supplied with a feeble current from the exciter, are subject to no natural deterioration, and are not liable to accident. They can only be damaged by carelessness; and, in case one should be so damaged, it may be easily removed and replaced, as the whole structure of the dynamo parts along a hori-

The illustration shows the side of the dynamo which carries the collecting-ring: the other side has a bearing similar to the one shown, beyond which is an overhung pulley made of compressed strawboard, which is found to be an excellent material for the purpose. The machine rests upon a cast-iron base, and is adjustable by means of a belt-tightener. The dynamo may be run in either direction or placed either way around on the base.

The Westinghouse Company at present manufacture five sizes of these dynamos, having capacities ranging from five hundred to five thousand 16-candle-power lights. The machine shown in the cut is the No. 2 dynamo, having a capacity of fifteen hundred lights.

The field-coils in these machines are supplied with current from a separate exciter, which is simply a small direct-current machine. The exciter may be driven by an independent engine, or it may, if desired, be attached to the shaft of the dynamo, in which case the dynamo is said to be self-exciting.

The armature of this dynamo is a structure of great simplicity. The body is of laminated iron plates, freely perforated for ventilating purposes. A single layer of wire is wound in flat coils back and forth across the face of the armature, parallel with the shaft, being held in place by stops on the ends of the armature. Mica and other insulation is provided, and the whole is wrapped with binding-wire. A ventilator is attached to each end of the armature, drawing a strong current of air through, thus insuring a sufficient degree of coolness. These armatures are uniformly wound to deliver a current of a thousand volts, a higher voltage than this for special circuits being obtained when necessary by means of a special converter. The absence of a commutator will be noticed in the illustration, its place being taken by two plain collecting-rings without breaks of any kind. Narrow collectors rest upon these rings, taking off the current as it is generated. With these collecting-rings it is obvious that the adjustment of the collectors is a matter of indifference, as no sparking can occur under any circumstance, there being no interruption of the current. The matter of dust or more or less oil has no effect, the whole device resolving itself into a detail of great simplicity.

GEOLOGICAL SURVEY OF NEW JERSEY.

THE work of this survey has been steadily prosecuted during the past year. In the annual report for 1887 it was stated that the Topographic and Magnetic Surveys of the State were completed, and that the reports upon these would be prepared and printed as rapidly as possible. This work is done, and the first volume of the final report of the Geological Survey of New Jersey is being distributed. It is an octavo volume of 450 pages, and contains a report on the Geodetic Survey by Professor Edward A. Bowser; on the Topographic and Magnetic Surveys, by C. C. Vermeule, C.E.; and on the climate of the State, by Professor John C. Smock. It also contains two maps of the State on a scale of five miles to an inch, — one showing its civil divisions; and the other, its elevations, mountains, ridges, valleys, and plains, together with its rivers and its drainage areas.

The work now preparing for publication as the second volume of the final report will contain a full catalogue of the minerals found in the State, with their localities; a catalogue of all the plants growing in the State, with notes of their occurrence and localities; and also catalogues of its vertebrate and invertebrate animals. Appendices to these catalogues will give some practical and economic particulars regarding them. Most of the work of preparing these catalogues is already done.

So much attention has been given in former reports to the study and description of the geological structure of the rocks of the State, that the work still to be done is mainly in combining and systematically arranging the materials which have been collected by various persons who have made New Jersey a study in former years. This is especially the case with the marl and clay formations in the middle of the State, and the limestones, slates, and sandstones in the north and north-western portions. There are some obscure and difficult points of structure in the red sandstone and the gneissic rocks; but it is thought that important progress has been made in clearing up these difficulties, and that the volume on structural geology can be prepared as soon as that above mentioned is out of the way, and that one on the economical geology can then properly complete the series.

The prompt publication and liberal distribution of the results of the State surveys have continued to meet the approval of the citizens, and to supply suggestive and needed information. The expenses of printing, mailing, and expressage are large; but the

returns in the development and wealth of the State abundantly justify the expenditure. The whole system of artesian well-boring was started at the direct suggestion of the survey, and it has brought inestimable sanitary and pecuniary benefits to the whole Atlantic coast, and has been of great service throughout the State. The description of the location and structure of our fire and potters' clays, and its publication, have caused the development of some of the best clay properties in the country, and have made public the immense stores of the best plastic and refractory materials in the immediate vicinity of the great manufactories and markets of the continent. The preparation and publication of the topographic maps, in advance of those of any other State, have tended to draw attention to the peculiar advantages of New Jersey in its location, its varied surface, its healthful seaside and mountain resorts, its water-supply, and its unequalled means of travel and communication. The maps are studied by engineers for projected improvements, by citizens seeking homes in the country, by land-owners who desire to improve or open their properties, as well as by intelligent and inquiring citizens of all kinds who are interested in the development and prosperity of the State. The publication of the condition of the mines, quarries, lime-production, marls, drained lands, water-supplies, and other matters of general interest, is continually inciting to new enterprises and the investment of capital; and the notes in regard to soils and the means for their improvement are helping to develop agriculture, and to greatly increase its products.

The public supply of pure and wholesome water to the people of the cities, towns, and villages, is of growing importance; and it needs to be kept before those who should reap the benefits of it. That there are abundant supplies of the best of water to be found in New Jersey, has been pointed out in several of the annual reports. Perhaps that of 1876 contained the most of detail. A bare repetition of some of the points may help to give a more definite idea of the magnitude and importance of the supply, as well as to keep the subject prominently in view.

From many years' observations it was shown that the annual rainfall varied in different years from about 30 inches in the driest years to about 60 inches in the wettest years, and that the average rainfall in all northern New Jersey was $44\frac{5}{16}$ inches per year. Observations upon the amount of water to be collected from the Croton watershed show that 60 per cent of the rainfall runs off in the streams. For purposes of safe calculation, however, it was assumed that only 40 per cent of the minimum rainfall should be depended upon: 40 per cent of 30 inches is 12 inches. From a square foot of surface, then, a cubic foot of water can be saved every year, or $7\frac{1}{2}$ gallons. From an acre, 326,700 gallons can be collected per year, or nearly 900 gallons per day. From a square mile there can be collected 209,088,000 gallons per year, or daily 572,844 gallons.

The watershed of the Passaic River above Little Falls is 750 square miles, being made up of the drainage areas of the following-named streams: Ramapo River, 148 square miles; Wanoque River, 108; Pequannac River, 82; Rockaway River, 165; Whippany River, 59; Passaic River, 188; total area of the Passaic and its branches, 750 square miles. Greenwood lake, with a drainage area of 32 square miles, is included in the Wanoque area. Lake Hopatcong, with a drainage area of 27 square miles, naturally found an outlet by the Musconetcong River into the Delaware; but, by the dam across its outlet, its surface has been raised so as to find an outlet by the Morris Canal into the watershed of the Passaic. The total area to be drawn from is, then, 777 square miles. This area can be depended upon to supply 500,000,000 gallons of water daily. At Little Falls, all this water is in one stream, at an elevation of 158 feet above mean tide; and it is only 16 miles from the centre of Newark, and 22 miles from the centre of Jersey City, or only about half the distance from which the Croton water is carried to New York. By going a few miles farther up the streams, most of the water could be collected at an elevation of 250 feet, or high enough to supply all of those cities by gravity.

The quality of this water is unquestionable in purity. It is mostly gathered from a country which is mountainous, mostly in forest, and likely to remain so for a long time to come. As a substitute